

Fig 1: Investigational mode: FNIR(N, 1, 0) vs. most accurate (yitu\_4)

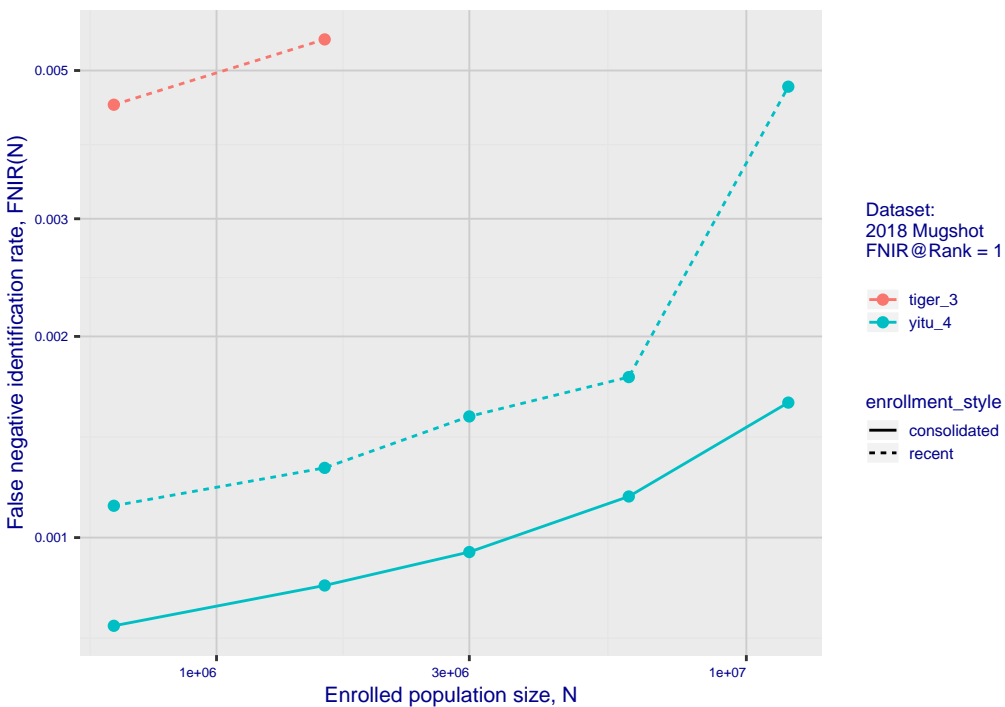


Fig 2: DETs by enrollment type

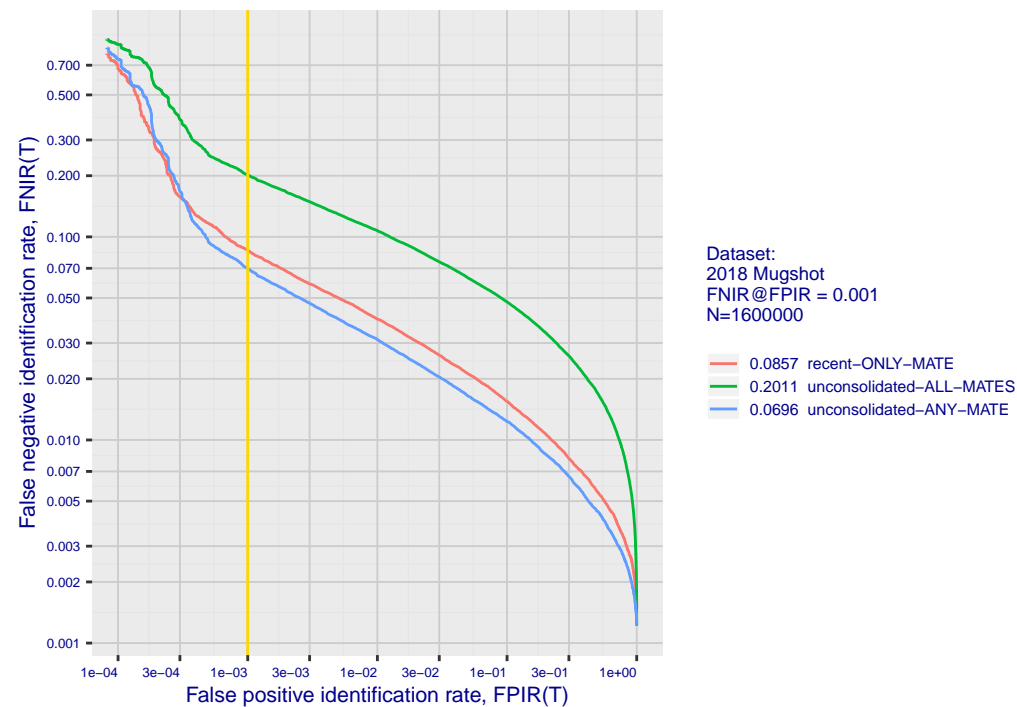


Fig 3: Identification mode: FNIR(N, L+1, T) vs. most accurate (nec\_3)

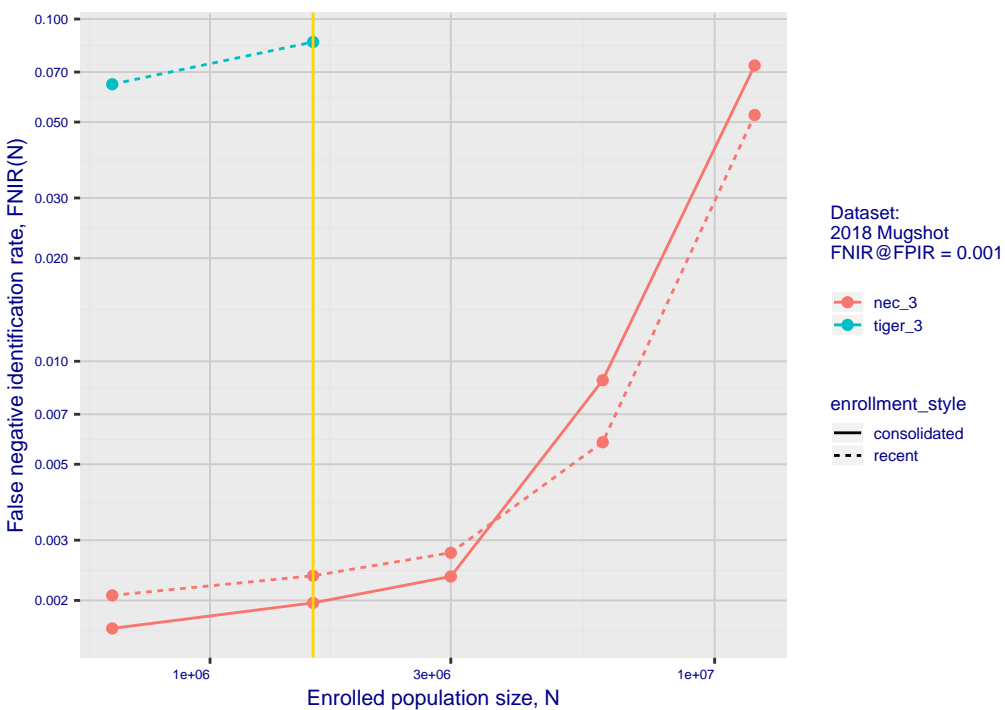


Fig 5: Dependence on T by number enrolled identities

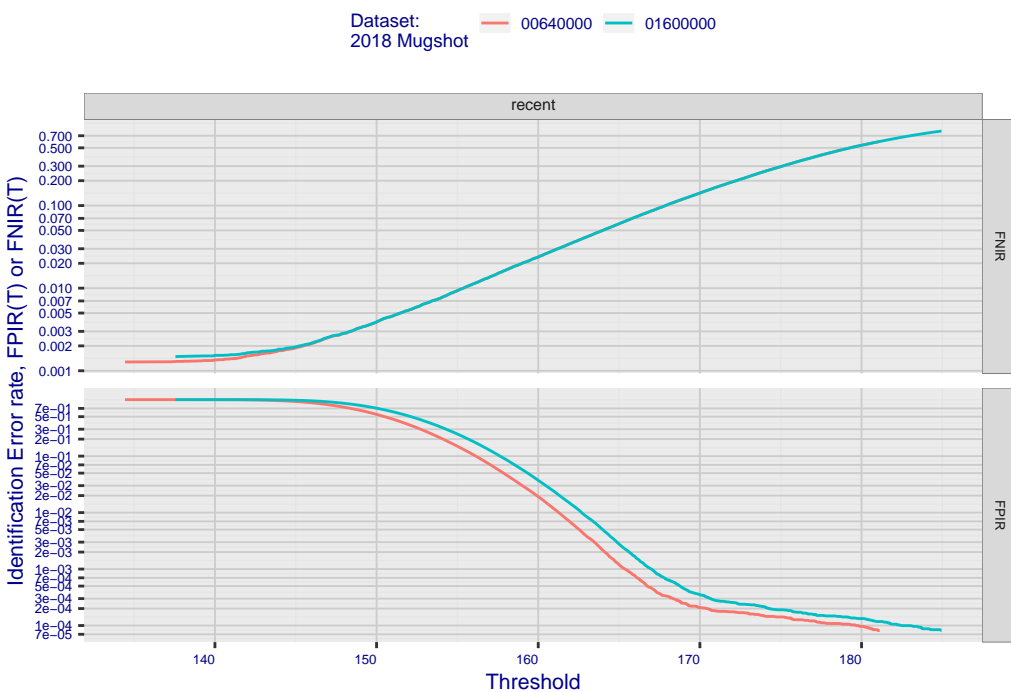


Fig 6: FPIR dependence on T by probe type

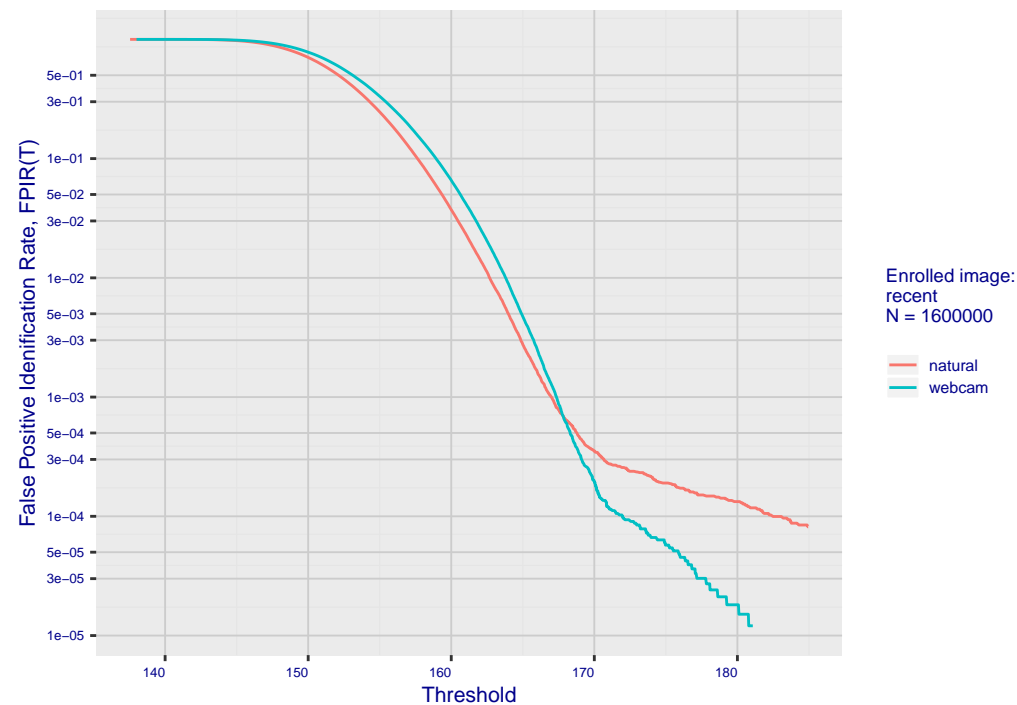


Fig 7: Investigational mode: FNIR(1600000, R, 0) by probe type


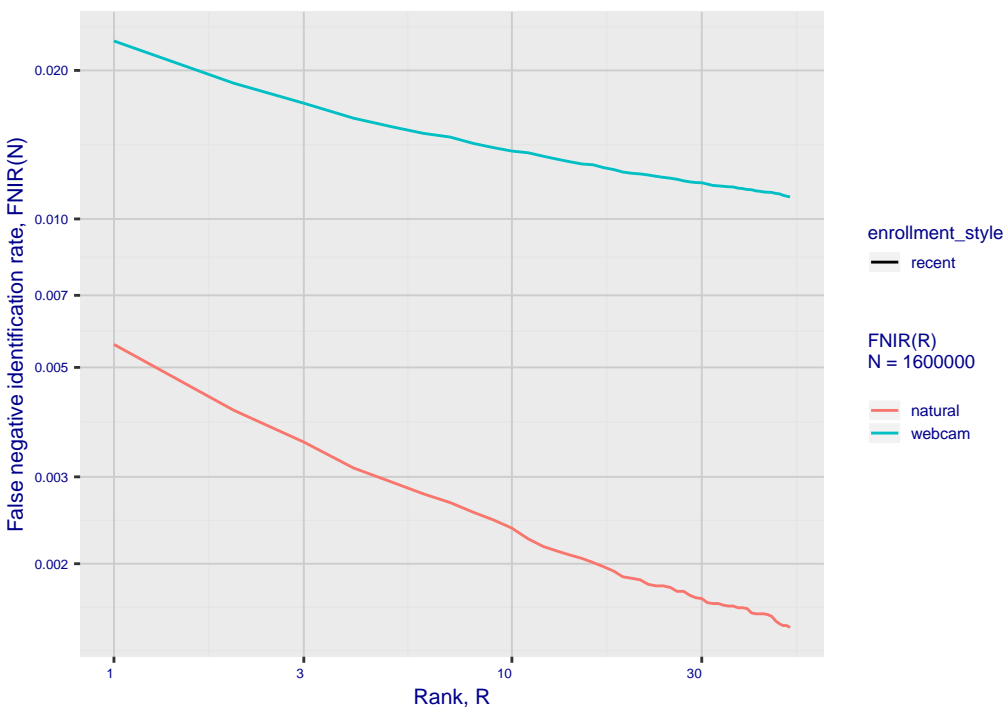


Fig 8: FPIR vs. Selectivity

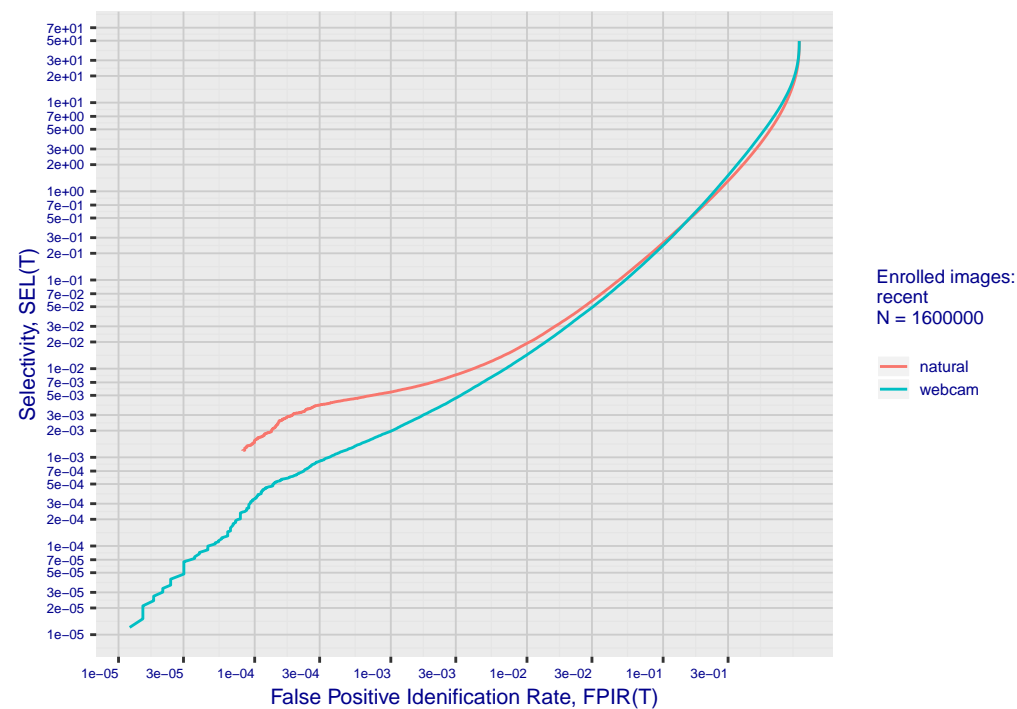

### 3. Report for algorithm tiger\_3 2020-03-20 13:23:46

Fig 10: Template duration; search duration vs. N

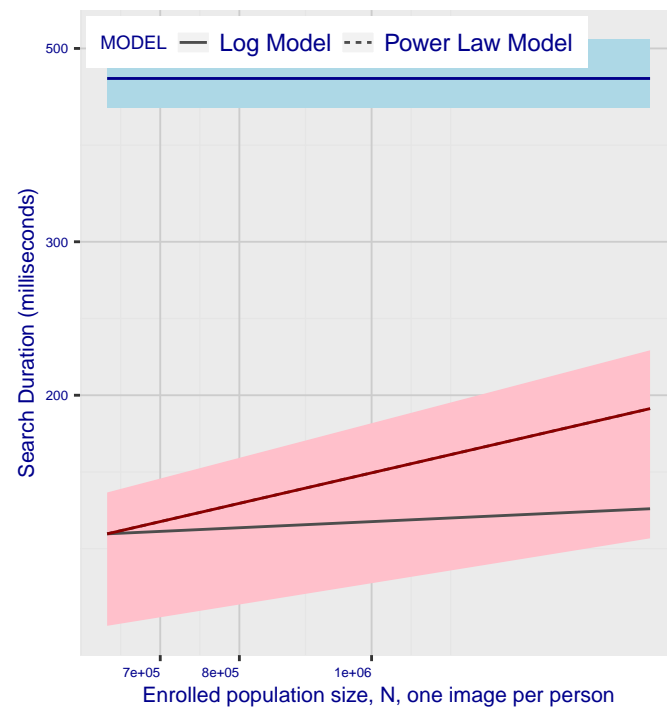


Fig 11: Datasheet

Algorithm: tiger\_3  
Developer: TigerIT Americas LLC  
Submission Date: 2018\_10\_30  
Template size: 2052 bytes  
Template time (2.5 percentile): 427 msec  
Template time (median): 462 msec  
Template time (97.5 percentile): 512 msec  
Investigation rank 64 --- FNIR(1600000, 0, 1) = 0.0056 vs. lowest 0.0010 from sens  
Identification rank 92 --- FNIR(1600000, T, L+1) = 0.0857  
FPIR = 0.001 vs. lowest 0.0018 from sensetime\_003